

Measuring point	Installation	Measuring task
1, 2, 3	pipeline oder bypass	monitoring the pickling bath
4	pipeline	monitoring the rinsing bath
5	pipeline	concentration measurement and fresh acid redosing control

Hydrochloric acid Pickling

Introduction

Pickling baths are used downstream of the hot rolling process, but also in many other fields of the metal-working industry to remove, modify, passivate or clean surfaces in a defined manner.

To this end, pickling solutions are employed, mainly consisting of mineral acids, like hydrochloric acid. The concentration of these acids decreases during the pickling process, whereas the degree of disturbing components such as contaminations and carry-over increases.

The LiquiSonic® measuring technology provides a solution for online measurements of pickling bath concentrations facilitating redosing of the required quantity of fresh acid. This ensures a continuous, optimum pickling bath quality. Delays in time as a result of sampling and lab analyses are avoided.

Application

Pickling removes impurities from the steel surface. However, the acid also attacks the iron oxide on the metal surface and ferrous salts are generated (e.g. iron (II)). It is therefore of great importance to precisely control all process-relevant parameters, such as dwell time, bath temperature and bath composition. Only in this way, pickling bathes can be operated in an economic and resource-saving manner.

The measuring system LiquiSonic® 40 allows the parallel detection of two physical quantities, such as sonic velocity and conductivity, and therefore the determination of the HCl concentration in the pickling bath as well as the iron content. This leads to the elimination of expensive laboratory analysis.

The inline LiquiSonic® sensors enable the user to monitor the process concentrations precise in real time and make pickling bath control automatable. Fluctuations can be seen and corrected immediately and very flexibly.

Customer value

The LiquiSonic® analyzer provides a precise inline bath concentration measurement with real-time monitoring and permanent data logging. This allows the process to be automatically controlled in the optimal concentration range with stable, sufficient pickling results. LiquiSonic® is used to avoid an underdosage or overdosage of HCl.

LiquiSonic® reduces many cost points such as laboratory measurements, material consumption, energy costs and increases pickling productivity through optimal process conditions.

An example calculation is based on a pickling line with a throughput of 500 mt/a.

- Laboratory costs: 1 h per day
→ 21,500 €/a
- 9 % increase in productivity
→ 91,000 €/a
- 5 % reduction in energy demand
→ 52,250 €/a
- 10 % HCl savings per year
→ 9,500 €/a
- 2 % saving in steel loss
→ 12,000 €/a

Installation

The LiquiSonic® 40 analyzer is installed into the transport pipelines (mostly DN80, 3") or the bypass of the pickling bath. Even for installation either in the transport line of the rinsing bath or in the fresh acid feed, SensoTech offers proven solutions for decades.

The robust sensor construction and the optional special materials, like Halar oder PFA, promote long process life.

The installation of the LiquiSonic® flange type sensor DN80 and the corresponding conductivity sensor in a piping system DN80 is simplified through the use of the installation adapter DN80. The total length of the measuring distance can be shortened by the adapter, to 0.70 m.


Typical measuring range:

concentration of free HCl: 0 - 120 g/l; 180 - 250 g/l

concentration range of Fe: 20 - 140 g/l

temperature range: 60 - 95 °C (140 - 200 °F)

LiquiSonic® 40 installation adapter for pickling bath

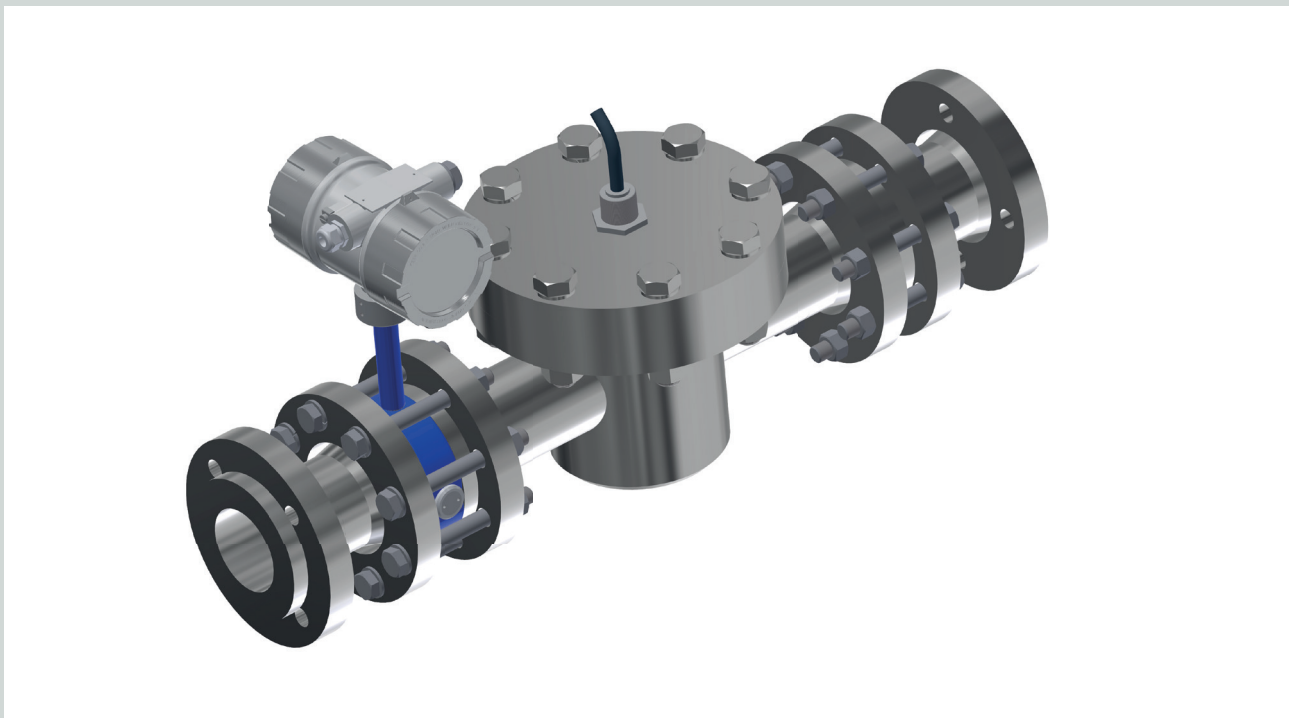

LiquiSonic® 40



21001411
LiquiSonic® Controller 40 V10



21010122
Flange sensor V10 DN80 (3"), Halar coating



21006125
Inductive conductivity sensor 226/1066

BUS

21004435
BUS connection: Profibus DP



21004449
Network integration



21004660
Installation adapter for pickling bath DN80



21004202
Bus cable indoor (100m)



21007846
Factory acceptance test (FAT) certificate



SensoTech GmbH
Germany
T +49 39203 514 100
info@sensotech.com
www.sensotech.com

SensoTech Inc.
USA
T +1 973 832 4575
sales-usa@sensotech.com
www.sensotech.com

SensoTech (Shanghai) Co., Ltd.
申铄科技(上海)有限公司
电话 +86 21 6485 5861
sales-china@sensotech.com
www.sensotech.com